


| | |
|---------------------|----------------------------------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: DLVP232-347V-RFCL |

SERIES SPECIFICATIONS




To supply and install TamLite DLVP series of fluorescent fixtures as specified. The luminaire shall operate from either 120V, 277V, or 347VAC and use high efficiency electronic ballasts. The housing and lens shall be constructed of a polycarbonate with a clamp down clear Makrolon® polycarbonate lens. The fixture shall be IP65 rated and include an IP66 strain relief. A durable formed gasket shall be provided between the enclosure and the lens. The fixture shall be made of highly specular material and contoured to maximize light output efficiency. All parts shall be corrosion resistant. Lamps shall be as specified, linear fluorescent lamps up to a maximum of the rated lamp wattage on the fixture nameplate. The lamps shall not be supplied with the luminaire. The fixture shall be c-UL-us approved.

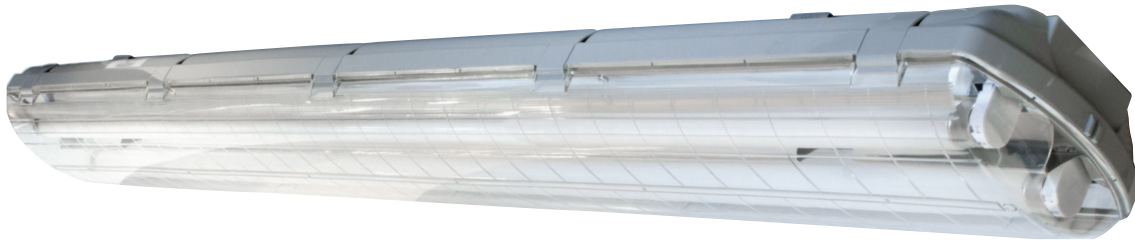

PERFORMANCE SPECIFICATIONS

FIG. 1 - Luminance Distribution Chart

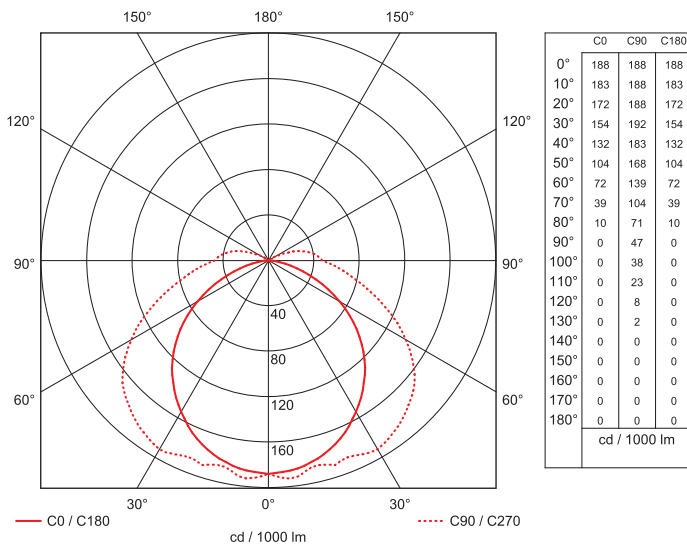

- Environmental Rating:** IP65
- Certification Standards:** cULus
- Limited Product Warranty:** 1 Year
- Anti-Corrosion Warranty:** 1 Year
- Operating Temp:** +0°F/-18°C
- Spacing Criteria:** Along (1.2), Across (1.5)

| | |
|---------------------|----------------------------------|
| CONTRACTOR: | |
| PROJECT: | DATE: |
| PREPARED BY: | MODEL#: DLVP232-347V-RFCL |

RECOMMENDED LAMP SPECIFICATION *not included

Lamp: Fusion FF32/T8
Wattage: 32W
Average Life: 24,000 Hrs

Lamp Type: T8 Linear Fluorescent
CRI: 85

Quantity: 2
Delivered Lumens: 3,000 Lumens

ELECTRICAL SPECIFICATIONS

Input Voltage: 347VAC
Lamp Type: Linear Fluorescent
Ballast: Fusion: FB232347E-L

Fixture Draw: 48W
Lamp Style: T8
Ballast Type: Electronic

Max Lamp Wattage: 32W
Lamp Base: G13
Ballast Warranty: 5 Years

FB232347E-L

| Lamp Type | Rated Lamp Watts | Min. Start Temp. (°F/°C) | Input Current (Amps) @347V | Input Power (Watts) | Ballast Factor | Max THD% | Power Factor | Max L.C.C.F |
|-----------|------------------|--------------------------|----------------------------|---------------------|----------------|----------|--------------|-------------|
| F32T8 | 32W | -18°C to 0°F | 0.14 | 48W | 0.77 | 10 | 0.99 | 1.7 |


PHYSICAL SPECIFICATIONS

Colour(s): Grey
Knockouts: PG16 Cable Gland (included)
Mounting: Mounting Clip (included)

Housing Material: UV stabilized polycarbonate
Lens Material: Impact-Resistant UV Stabilized Polycarbonate

Lens Type: Clear
Reflector Material: Aluminum

LINE DRAWING

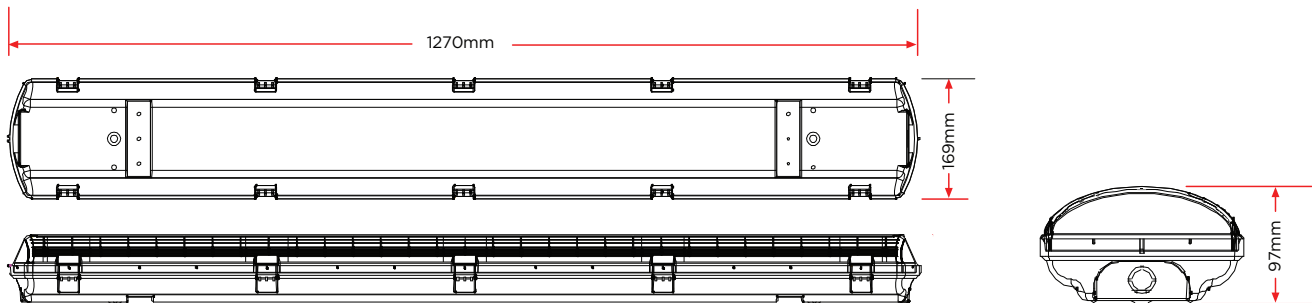

ORDERING INFORMATION

Part Number: DLVP232-347V-RFCL
Carton Quantity: 1

Shipping Length: 50.5" - 1276mm
Shipping Width: 6.75" - 172mm

Shipping Height: 4" - 102mm
Shipping Weight: 8.6lbs - 3.9kg

Optional Extras: DLVPSD4 (Spare 4' Diffuser), DVL PSSC (10pk Stainless Steel Clips)