

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TLHBL24050K-UNV

## SERIES SPECIFICATIONS




To supply and install TamLite TLHBL series of LED Highbays as specified. The luminaire shall operate at 120VAC to 277VAC. The housing shall be constructed of powder-coated aluminum with a heat and impact resistant tempered PMMA lens. All parts shall be corrosion resistant. The LEDs shall be supplied with the luminaire. The fixture shall be c-UL-us listed and DLC Qualified.



## PERFORMANCE SPECIFICATIONS

FIG. 1 - Luminance Distribution Chart

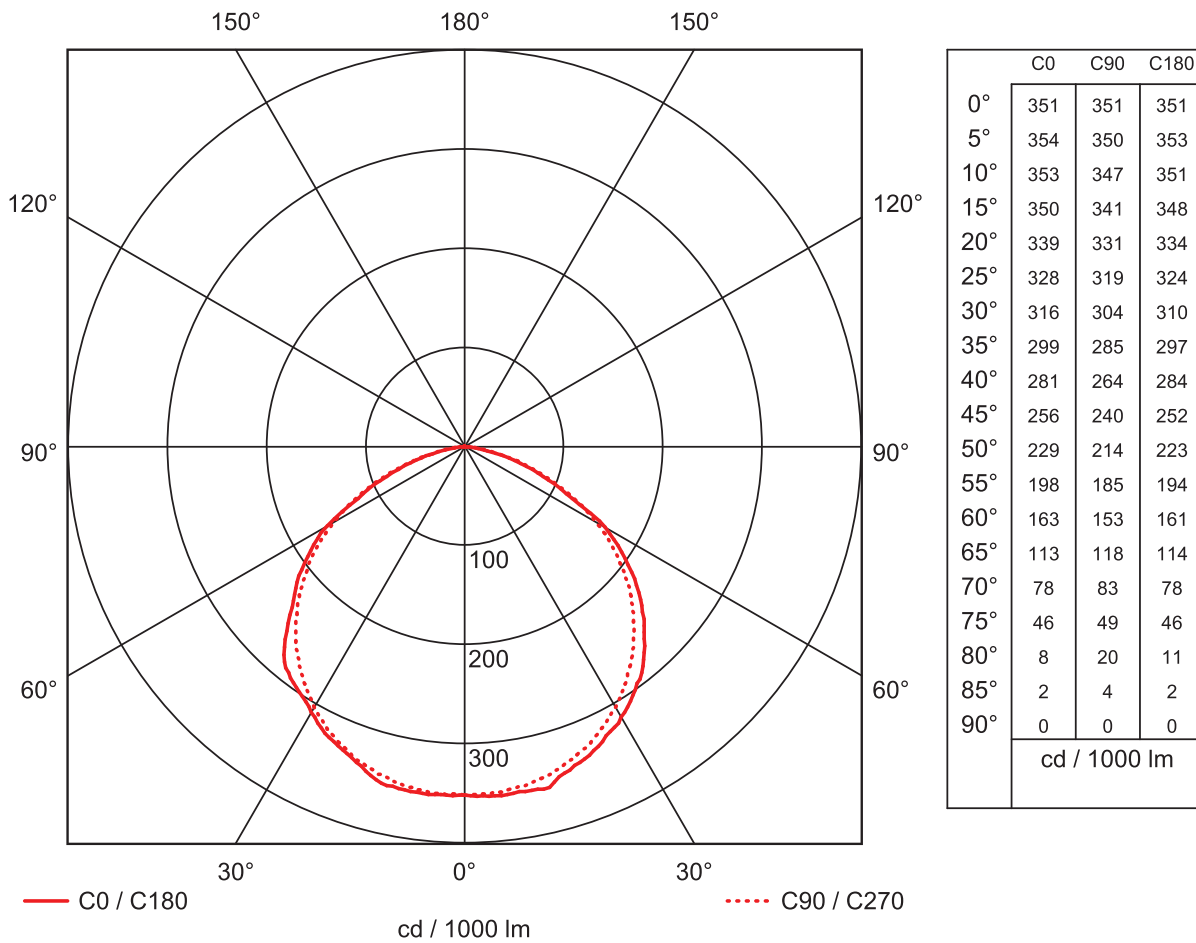

<b>CONTRACTOR:</b>	
<b>PROJECT:</b>	<b>DATE:</b>
<b>PREPARED BY:</b>	<b>MODEL#:</b> TLHBL24050K-UNV

## PERFORMANCE SPECIFICATIONS

**Initial Lumen Output:** 32759.00 lm  
**Efficacy:** 133.69 lm/W  
**Operating Temp:** -20°C to +40°C

**Environmental Rating:** IP20  
**Certification Standards:** cULus, DLC

**Anti-Corrosion Warranty:** 5 Years  
**Limited Product Warranty:** 5 Years

## LED SPECIFICATIONS

**LED Type:** Array  
**CRI:** 83.4  
**R9:** 10

**Average Life:**  $L_{70} = >50,000$  hrs  
**Colour Temperature:** 5117K  
**Chromaticity:**  $x = 0.3422; y = 0.3535$

**Dimming:** 1-10V  
**Duv:** 0.0021

## ELECTRICAL SPECIFICATIONS

**Voltage:** 120-277VAC  
**Frequency:** 60 Hz  
**Fixture Draw:** 245.04W

**Current Draw:** 2.0504A  
**Power Factor:** 0.9958

**THD (%):** 6.62%  
**Driver:** Arcata


## PHYSICAL SPECIFICATIONS

**Colour(s):** White  
**Finished Type:** Textured Powder Coat  
 over Chromate Conversion Coat

**Wiring:** Luminaire Disconnect  
**Mounting:** Surface, Suspended  
**Housing Material:** Die-Cast Aluminum

**Lens Material:** Polycarbonate  
**Lens Type:** Clear

## LINE DRAWING

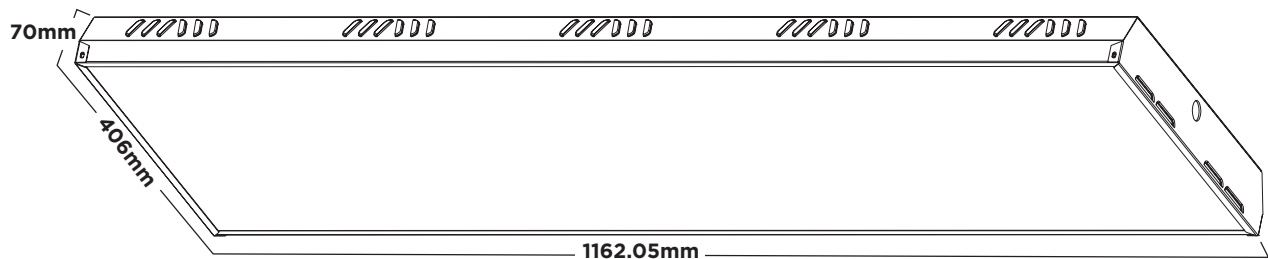

## ORDERING INFORMATION

**Part Number:** TLHBL24050K-UNV

**Box Quantity:** 1

**Box Length:** 1195mm - 47.05"

**Box Height:** 80mm - 3.15"

**Box Width:** 345mm - 13.60"

**Optional Extras:** TLHB-C10 (10FT SOOW Cord)