

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TAFML422

SERIES SPECIFICATIONS



To supply and install Tamlite's TAFML Series of LED Flush Mount Luminaire as specified. The Luminaire shall operate at 120VAC to 277VAC. The frame shall be constructed of formed steel with a tamper resistant Acrylic Lens. LEDs shall be as specified Hongli LED chips. The luminaire shall be c-UL-us listed and Energy Star Approved.



PERFORMANCE SPECIFICATIONS

FIG.1 - Luminance Distribution Chart

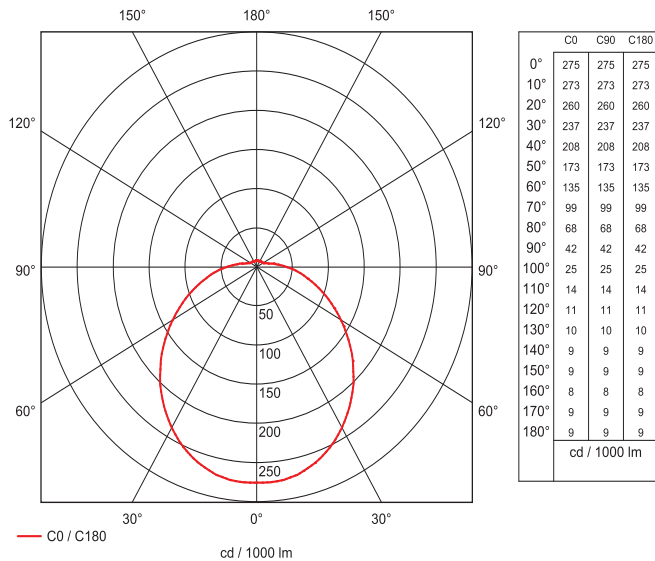


FIG.2- Zonal Lumen Summary

ZONE	LUMENS	LAMP %	LUMINAIRE %
0-30	432	21.69%	21.69%
0-40	710	35.63%	35.63%
0-60	1277	64.11%	64.11%
0-90	1801	90.37%	90.37%
40-90	1091	54.74%	54.74%
60-90	523	26.26%	26.26%
90-180	192	9.63%	9.63%
0-180	1993	100.00%	100.00%

Initial Lumen Output - 2000 lm ± 10%
Certification Standards: cULus, Energy Star
Limited Product Warranty: 5 Years
Operating Temp: -20°C to +40°C
Spacing Criteria: 1.3 (C0/180); 1.3 (C90/270)
Efficacy - 100.44 lm/W
Environmental Rating: IP44
UL Classification: Damp Location Listed

CONTRACTOR:		DATE:
PROJECT:		MODEL#: TAFML422
PREPARED BY:		

PERFORMANCE SPECIFICATIONS

FIG.3 - Coefficients of Utilization

Effective Floor Cavity Reflectance - .20

CC	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	1.13	1.06	1.06	1.06	.99	.99	.99	.93	.93	.93	.90
1	1.051	.00	.95	.91	1.01	.97	.92	.88	.91	.87	.84	.85	.82	.80	.80	.78	.75	.73
2	.96	.87	.80	.74	.92	.84	.78	.72	.79	.74	.69	.74	.70	.66	.70	.66	.63	.60
3	.87	.76	.68	.61	.84	.74	.66	.60	.70	.63	.58	.65	.60	.56	.62	.57	.53	.51
4	.80	.68	.59	.52	.77	.66	.58	.51	.62	.55	.50	.59	.53	.48	.56	.51	.46	.44
5	.73	.60	.51	.45	.70	.59	.50	.44	.55	.48	.43	.53	.46	.41	.50	.44	.40	.38
6	.68	.54	.45	.39	.65	.53	.44	.38	.50	.42	.37	.47	.41	.36	.45	.39	.35	.33
7	.62	.48	.40	.34	.60	.47	.39	.33	.45	.37	.32	.42	.36	.31	.40	.35	.30	.28
8	.57	.44	.35	.29	.55	.43	.35	.29	.41	.33	.28	.39	.32	.27	.37	.31	.27	.25
9	.53	.40	.31	.26	.51	.39	.31	.25	.37	.30	.25	.35	.29	.24	.33	.28	.23	.22
10	.49	.36	.28	.23	.48	.35	.28	.23	.34	.27	.22	.32	.26	.21	.31	.25	.21	.19

ELECTRICAL SPECIFICATIONS

Voltage: 120-277VAC
Frequency: 60 Hz

Current Draw: 0.180A
Power Factor: 0.969 @120VAC

Fixture Draw: 22W ± 10%



LED SPECIFICATIONS

LED Chip: Hongli
LED Type: Array

CRI: 80.7
Average Life: L70(6K)=35,000 hrs

CCT: 4000K
Dimming: Not dimmable

LINE DRAWING

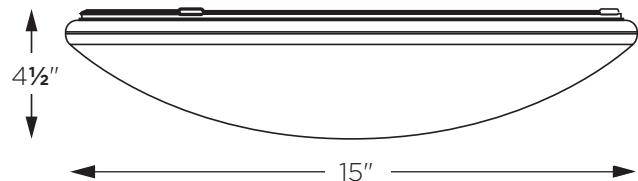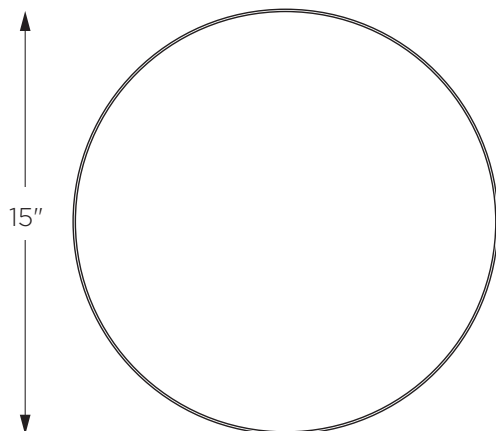

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TAFML422

PHYSICAL SPECIFICATIONS

Mounting: Surface **Lens Type:** Tamper Resistant Acrylic **Housing Material:** Formed Steel

ORDERING INFORMATION

Part Number: TAFML422

Inner Carton Quantity: 1

Inner Carton Length: 425mm - 16.73"

Inner Carton Width: 117mm - 4.60"

Inner Carton Height: 425mm - 16.73"

Inner Carton Weight: 1.11kg - 2.45lbs

Outer Carton Quantity: 10

Outer Carton Length: 865mm - 34.05"

Outer Carton Width: 605mm - 23.81"

Outer Carton Height: 450mm - 17.71"



The U.S. Department of Energy's LED Lighting Facts® Program has verified product performance based on industry-standardized testing.



For details, see: _____ Tamlite Lighting

Model # _____ TAFML422

www.lightingfacts.com/products